Bright 1
Bollard Light

IP 65



AGXUSB0128

Height(mm)	304
Light Source	1×10W
LENS	B51
Selected Degree(°)θ1/2	36°
Input Voltage (V)	DC24/ 240
Operating Current(MA)	24V=458 240V=49
Consumption(W)	11
Luminance(LM)	329
IK	07





AGXUMB0128

Height(mm)	704
Light Source	1×10W
LENS	B51
Selected Degree(°)θ1/2	36°
Input Voltage (V)	DC24/ 240
Operating Current(MA)	24V=458 240V=49
Consumption(W)	11
Luminance(LM)	329
IK	07





Specification	
Housing	ADC 12# Die-casting aluminum powder coated . T=60-80μm Adhesion of ISO class 1/ASTM class 4B
Light Window	PC
LED Type	COB
LED Driver	Built in on/off driver
Operating Temperature	-20˚C~40˚C
Power Cable	Outside of luminaire (Without waterstopper) 12V/24V: H05RN-F 2×1.0mm², L=0.5m 120V/240V: H05RN-F 3×1.0mm², L=0.5m

Painting Color

Primary

Sanded Black
RAL 9005

Secondary

Sanded Dark Grey
KAP 7037

Sanded Bronze
KAP 7008

Lens

Item Code	Referenced Degree(°)θ1/2
B51	20° 28° 36° 60°
B112	15° 24° 36° 60°

Installation Base

1. Flange Base(included)	2. Inground Base(option)
	AGXULB0128 AGXUMB0128
	AGXJC3004
Type A	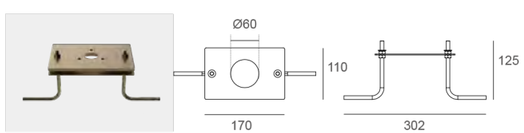
Type B Non-Flange	

TRIAC PWM 1-10V DALI IP65 OUTDOOR RATED RoHS COMPLIANT CE

aglighting.mx