



# **LINEAR WALL WASHER**

**MODEL** | AGL-G711E-XCET / AGL-G711E-XLET  
**FAMILY** | GAE

## DESCRIPTION

A new generation of linear wall washer. Seamless, perfectly stitching designed fixture with a length of 305 millimeter, with power supply and driver built in lamp body, integrated power and DMX signal cable. Flexible lighting device for application in a variety of building structures. Extruded aluminium.

## TYPE OF MOUNTING

Surface Mounting on floor

## TECHNICAL SPECIFICATIONS

Model	AGL-G711E-XCET	AGL-G711E-XLET
Power	20 W	20 W
Lumens	863 lm	733 lm
Efficiency	43 lm/W	36 lm/W
Input Voltage	AC100-277V	AC100-240V
CCT	RGBW	RGBL
Beam Angle	15° (25° / 30° / 60° / 30°x15° / 60°x10°)	15° (25° / 30° / 60° / 30°x15° / 60°x10°)
Operating temperature	-40° to 45° C	-40° to 45° C


## COLORS




Silver



## DIMENSION

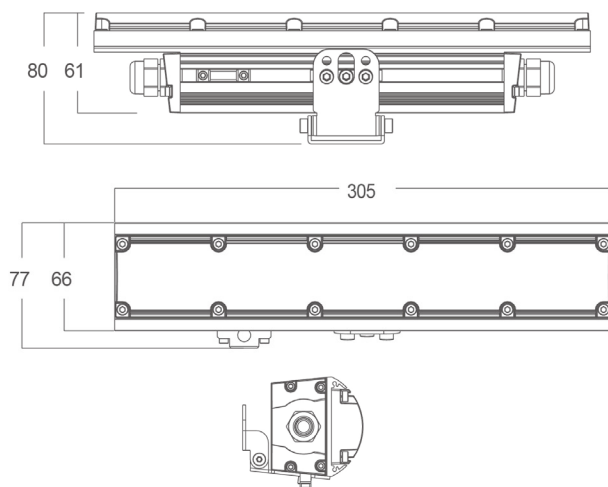

## PHOTOMETRIC CURVE

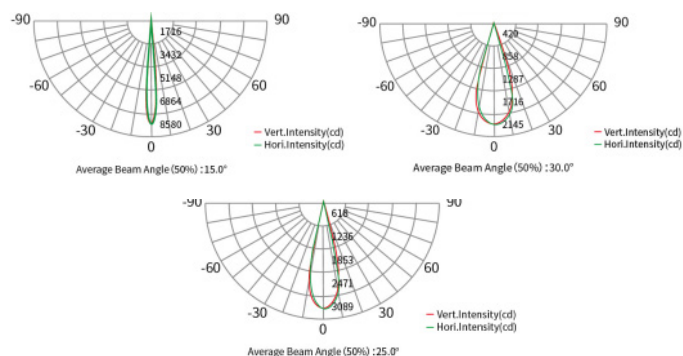

<b>MODEL</b>	AGL-G711E-XCT / AGL-G711E-SCT / AGL-G711E-SWT / AGL-G711E-CAT
<b>FAMILY</b>	GAE

## DESCRIPTION

A new generation of linear wall washer. Seamless, perfectly stitching designed fixture with a length of 305 millimeter, with power supply and driver built in lamp body, integrated power and DMX signal cable. Flexible lighting device for application in a variety of building structures. Extruded aluminium.



## TYPE OF MOUNTING

Surface Mounting on floor

## COLORS




Silver


## TECHNICAL SPECIFICATIONS

Model	AGL-G711E-XCT	AGL-G711E-SCT	AGL-G711E-SWT	AGL-G711E-CAT
<b>Power</b>	20 W	20 W	20 W	20 W
<b>Lumens</b>	989 lm	1 514 lm	1 435 lm	1 750 lm
<b>Efficiency</b>	49 lm/W	75 lm/W	71 lm/W	87 lm/W
<b>Input Voltage</b>	AC100-277V	AC100-277V	AC100-277V	AC100-277V
<b>CCT</b>	RGBW	Cool white	Warm white	Cool white + Amber
<b>Beam Angle</b>	10° (25°/60°/10°x60°/30°x15°)	10° (25°/60°/10°x60°/30°x15°)	10° (25°/60°/10°x60°/30°x15°)	10° (25°/60°/10°x60°/30°x15°)
<b>Operating temperature</b>	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C

## DIMENSION

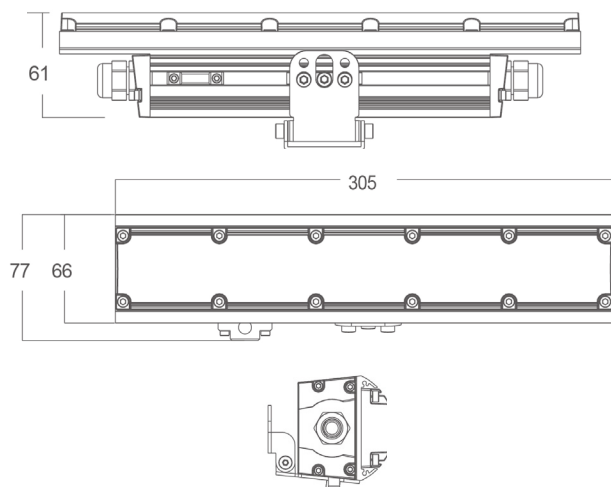

## PHOTOMETRIC CURVE

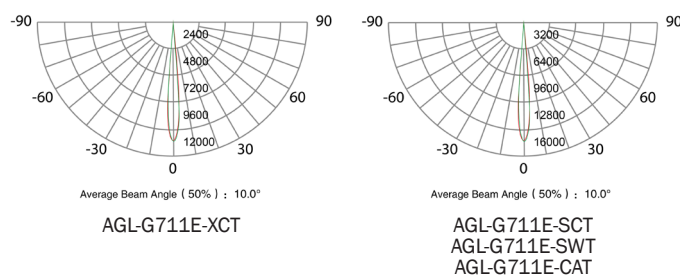

<b>MODEL</b>	AGL-G712E-XCT / AGL-G712E-SCT / AGL-G712E-SWT / AGL-G712E-CAT
<b>FAMILY</b>	GAE

## DESCRIPTION

A new generation of linear wall washer. Seamless, perfectly stitching designed fixture with a length of 610 millimeter, with power supply and driver built in lamp body, integrated power and DMX signal cable. Flexible lighting device for application in a variety of building structures. Extruded aluminium.



## TYPE OF MOUNTING

Surface Mounting on floor

## COLORS




Silver


## TECHNICAL SPECIFICATIONS

Model	AGL-G712E-XCT	AGL-G712E-SCT	AGL-G712E-SWT	AGL-G712E-CAT	AGL-G712E-XLET
<b>Power</b>	40 W	40 W	40 W	40 W	40 W
<b>Lumens</b>	2 034 lm	2 816 lm	2 675 lm	3 500 lm	1 460 lm
<b>Efficiency</b>	50 lm/W	70 lm/W	66 lm/W	87 lm/W	36 lm/W
<b>Input Voltage</b>	AC100-277V	AC100-277V	AC100-277V	AC100-277V	AC100-240V
<b>CCT</b>	RGBW	Cool white	Warm white	Cool white + Amber	RGBL
<b>Beam Angle</b>	10° (25°/60°/10°x60°)	10° (25°/60°/10°x60°)	10° (25°/60°/10°x60°)	10° (25°/60°/10°x60°)	15° (25°, 30°, 60°, 40°x15°, 10°x60°)
<b>Operating temperature</b>	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C

## DIMENSION

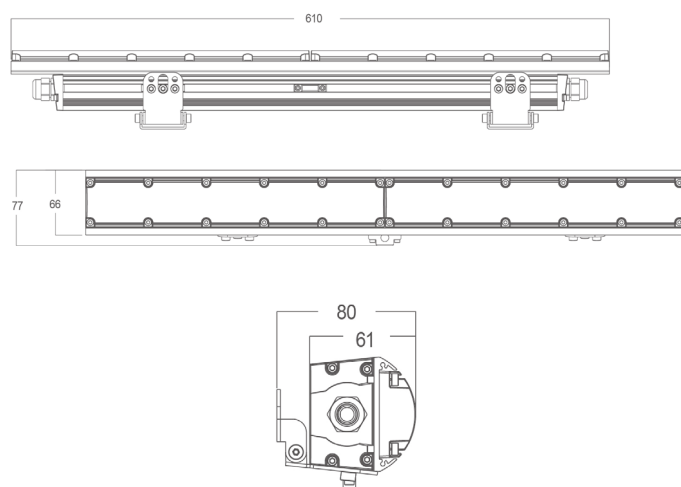

## PHOTOMETRIC CURVE

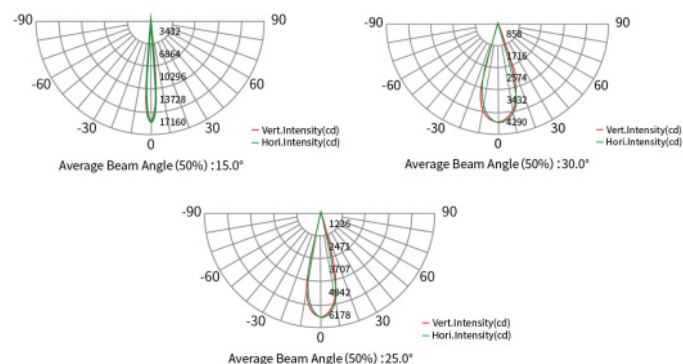

**MODEL** | AGL-G712E-XCET  
**FAMILY** | GAE

## DESCRIPTION

A new generation of linear wall washer. Seamless, perfectly stitching designed fixture with a length of 610 millimeter, with power supply and driver built in lamp body, integrated power and DMX signal cable. Flexible lighting device for application in a variety of building structures. Extruded aluminium.



## TYPE OF MOUNTING

Surface Mounting on floor

## COLORS




Silver


## TECHNICAL SPECIFICATIONS

<b>Model</b>	<b>AGL-G712E-XCET</b>
<b>Power</b>	40 W
<b>Lumens</b>	1 600 lm
<b>Efficiency</b>	40 lm/W
<b>Input Voltage</b>	AC100-277V
<b>CCT</b>	RGBW
<b>Beam Angle</b>	15° (25° / 60° / 40°x15° / 60°x10°)
<b>Operating temperature</b>	-40° to 45 °C

## DIMENSION

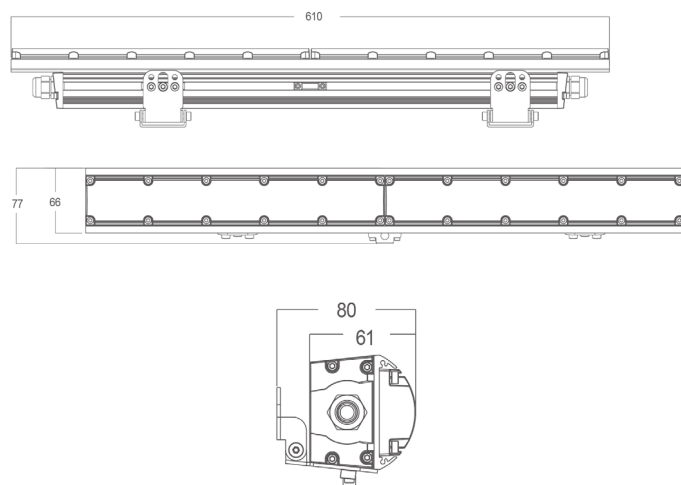

## PHOTOMETRIC CURVE

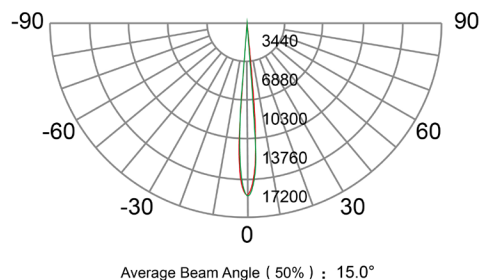

<b>MODEL</b>	AGL-G713E-XCT / AGL-G713E-SCT / AGL-G713E-SWT / AGL-G713E-CAT
<b>FAMILY</b>	GAE

## DESCRIPTION

A new generation of linear wall washer. Seamless, perfectly stitching designed fixture with a length of 915 millimeter, with power supply and driver built in lamp body, integrated power and DMX signal cable. Flexible lighting device for application in a variety of building structures. Extruded aluminium.



## TYPE OF MOUNTING

Surface Mounting on floor

## COLORS




Silver


## TECHNICAL SPECIFICATIONS

Model	AGL-G713E-XCT	AGL-G713E-SCT	AGL-G713E-SWT	AGL-G713E-CAT
<b>Power</b>	60 W	60 W	60 W	60 W
<b>Lumens</b>	3 334 lm	3 974 lm	3 775 lm	5 200 lm
<b>Efficiency</b>	55 lm/W	66 lm/W	62 lm/W	86 lm/W
<b>Input Voltage</b>	AC100-277V	AC100-277V	AC100-277V	AC100-277V
<b>CCT</b>	RGBW	Cool white	Warm white	Cool white + Amber
<b>Beam Angle</b>	10° (25°/30°/60° 40°x15°/60°x10°)	10° (25°/30°/60° 40°x15°/60°x10°)	10° (25°/30°/60° 40°x15°/60°x10°)	10° (25°/30°/60° 40°x15°/60°x10°)
<b>Operating temperature</b>	-40° to 45° C	-40° to 45° C	-40° to 45° C	-40° to 45° C

## DIMENSION

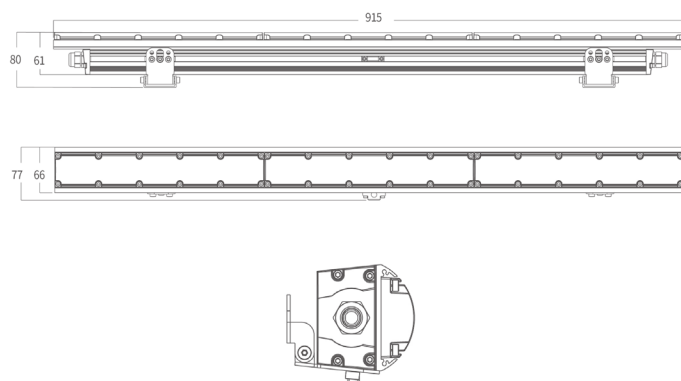

## PHOTOMETRIC CURVE

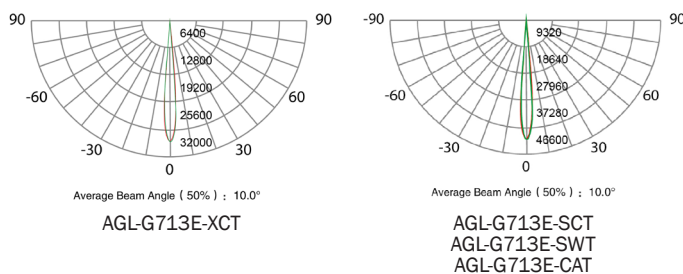

<b>MODEL</b>	<b>AGL-G713E-XCET / AGL-G713E-XLET</b>
<b>FAMILY</b>	<b>GAE</b>

## DESCRIPTION

A new generation of linear wall washer. Seamless, perfectly stitching designed fixture with a length of 915 millimeter, with power supply and driver built in lamp body, integrated power and DMX signal cable. Flexible lighting device for application in a variety of building structures. Extruded aluminium.


## TYPE OF MOUNTING

Surface Mounting on floor


## TECHNICAL SPECIFICATIONS

Model	AGL-G713E-XCET	AGL-G713E-XLET
Power	60 W	60 W
Lumens	2 258 lm	1 860 lm
Efficiency	37 lm/W	31 lm/W
Input Voltage	AC100-277V	AC100-240V
CCT	RGBW	RGBL
Beam Angle	15° (25° / 60° / 40°x15° / 60°x10°)	15° (25° / 60° / 40°x15° / 60°x10°)
Operating temperature	-40° to 45° C	-40° to 45° C

## DIMENSION

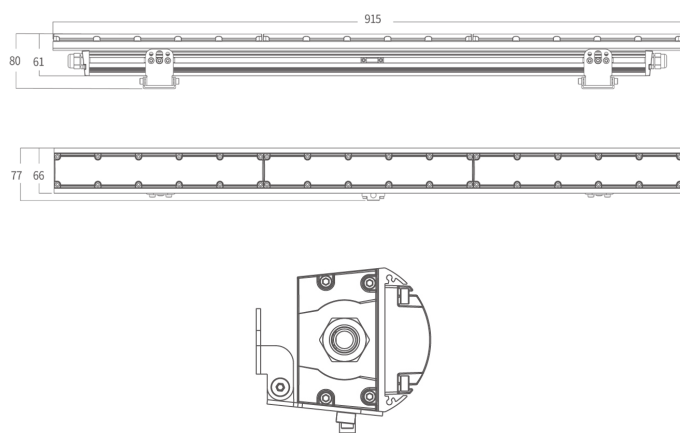

## PHOTOMETRIC CURVE

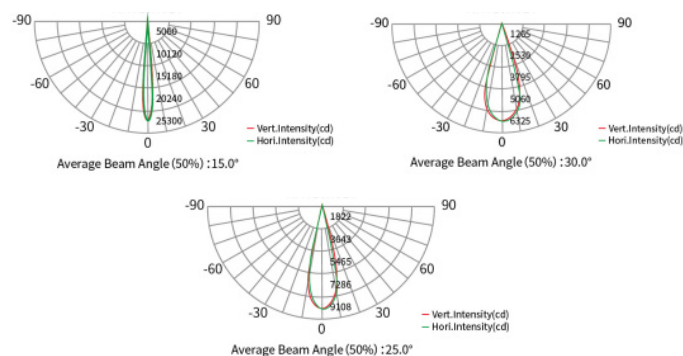

<b>MODEL</b>	<b>AGL-G714E-XCT / AGL-G714E-SCT / AGL-G714E-SWT / AGL-G714E-CAT</b>
<b>FAMILY</b>	<b>GAE</b>

## DESCRIPTION

A new generation of linear wall washer. Seamless, perfectly stitching designed fixture with a length of 1 220 millimeter, with power supply and driver built in lamp body, integrated power and DMX signal cable. Flexible lighting device for application in a variety of building structures. Extruded aluminium.



## TYPE OF MOUNTING

Surface Mounting on floor

## COLORS





Silver


## TECHNICAL SPECIFICATIONS

Model	AGL-G714E-XCT	AGL-G714E-SCT	AGL-G714E-SWT	AGL-G714E-CAT
<b>Power</b>	80 W	80 W	80 W	80 W
<b>Lumens</b>	4 490 lm	4 639 lm	4 408 lm	7 031 lm
<b>Efficiency</b>	56 lm/W	58 lm/W	55 lm/W	87 lm/W
<b>Input Voltage</b>	AC100-277V	AC100-277V	AC100-277V	AC100-277V
<b>CCT</b>	RGBW	Cool white	Warm white	Cool white + Amber
<b>Beam Angle</b>	15° (10° / 25° / 60° / 60x10°)	15° (10° / 25° / 60° / 60x10°)	15° (10° / 25° / 60° / 60x10°)	15° (10° / 25° / 60° / 40x15°/60x10°)
<b>Operating temperature</b>	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C

## DIMENSION

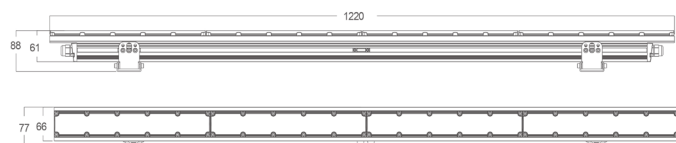

## PHOTOMETRIC CURVE

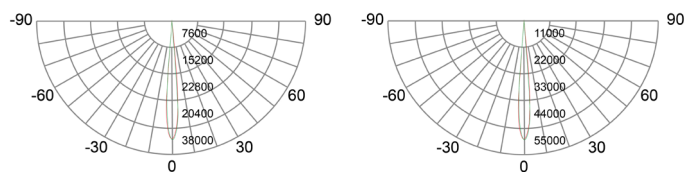


Average Beam Angle ( 50% ) : 15.0°

AGL-G714E-XCT

Average Beam Angle ( 50% ) : 15.0°

AGL-G714E-SCT

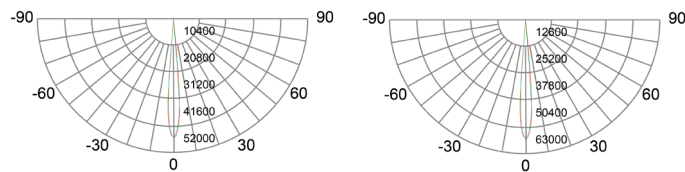

Average Beam Angle ( 50% ) : 15.0°

AGL-G714E-SWT

Average Beam Angle ( 50% ) : 15.0°

AGL-G714E-CAT



<b>MODEL</b>	<b>AGL-G714E-XCET / AGL-G714E-XLET</b>
<b>FAMILY</b>	<b>GAE</b>

## DESCRIPTION

A new generation of linear wall washer. Seamless, perfectly stitching designed fixture with a length of 1 220 millimeter, with power supply and driver built in lamp body, integrated power and DMX signal cable. Flexible lighting device for application in a variety of building structures. Extruded aluminium.


## TYPE OF MOUNTING

Surface Mounting on floor

## TECHNICAL SPECIFICATIONS

Model	AGL-G714E-XCET	AGL-G714E-XLET
Power	80 W	80 W
Lumens	2 900 lm	2 900 lm
Efficiency	36 lm/W	36 lm/W
Input Voltage	AC100-277V	AC100-240V
CCT	RGBW	RGBL
Beam Angle	15° (25° / 60° / 40°x15° / 60°x10°)	15° (25° / 60° / 40°x15° / 60°x10°)
Operating temperature	-40° to 45° C	-40° to 45° C

## DIMENSION

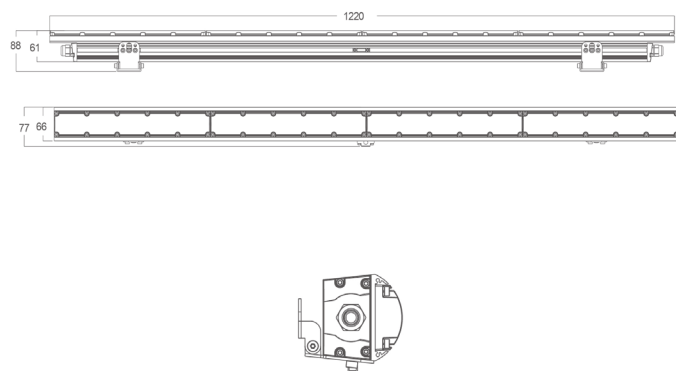


## COLORS



Silver

## PHOTOMETRIC CURVE

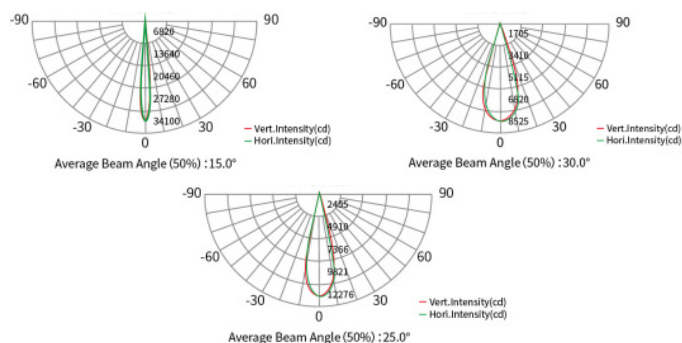

<b>MODEL</b>	<b>AGL-L18R-LSWT-DK / AGL-L18R-LSWT-GK</b> <b>AGL-L18R-HSWT-DK / AGL-L18R-HSWT-GK</b>
<b>FAMILY</b>	<b>LAR</b>

## DESCRIPTION

The Linear series light is a powerful LED wall washer, suitable for operation in all-weather conditions. It is small in size, light in weight, able to achieve seamless stitching. With flexible section control function, it is possible to realize colorful pixel effect for the hotels, shopping malls, buildings, square landscapes, municipals, bridges, and other outdoor landscape lighting projects to provide new lighting solutions. Extruded aluminium.



## TYPE OF MOUNTING

Surface Mounting on floor

## COLORS




Silver


## TECHNICAL SPECIFICATIONS

Model	AGL-L18R-LSWT-DK	AGL-L18R-LSWT-GK	AGL-L18R-HSWT-DK	AGL-L18R-HSWT-GK
<b>Power</b>	18 W	18 W	18 W	18 W
<b>Lumens</b>	1 131.75 lm	1 131.75 lm	1 131.75 lm	1 131.75 lm
<b>Efficiency</b>	63 lm/W	63 lm/W	63 lm/W	63 lm/W
<b>Input Voltage</b>	DC 24V	AC100~240V	DC 24V	AC100~240V
<b>CCT</b>	Warm white	Warm white	Warm white	Warm white
<b>Beam Angle</b>	15°/20°/30°/45°/60°/40x20°/60x10°	15°/20°/30°/45°/60°/40x20°/60x10°	15°/20°/30°/45°/60°/40x20°/60x10°	15°/20°/30°/45°/60°/40x20°/60x10°
<b>Operating temperature</b>	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C

## DIMENSION

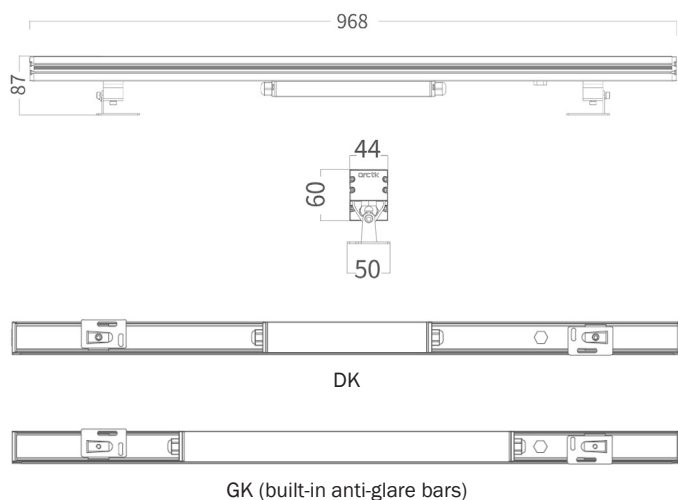

## PHOTOMETRIC CURVE

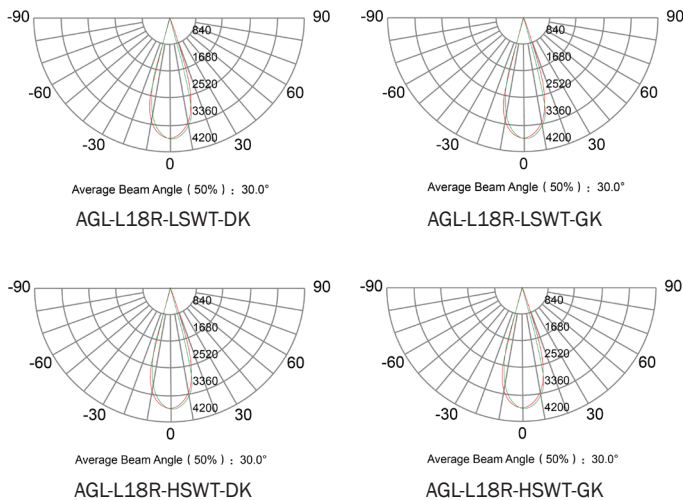

**MODEL** AGL-L24R-LSWT-DK / AGL-L24R-LSWT-GK  
AGL-L24R-HSWT-DK / AGL-L24R-HSWT-GK

**FAMILY** LAR

## DESCRIPTION

The Linear series light is a powerful LED wall washer, suitable for operation in all-weather conditions. It is small in size, light in weight, able to achieve seamless stitching. With flexible section control function, it is possible to realize colorful pixel effect for the hotels, shopping malls, buildings, square landscapes, municipals, bridges, and other outdoor landscape lighting projects to provide new lighting solutions. Extruded aluminium.



## TYPE OF MOUNTING

Surface Mounting on floor

## COLORS




Silver


## TECHNICAL SPECIFICATIONS

Model	AGL-L24R-LSWT-DK	AGL-L24R-LSWT-GK	AGL-L24R-HSWT-DK	AGL-L24R-HSWT-GK
Power	24 W	24 W	24 W	24 W
Lumens	1 509 lm	1 509 lm	1 509 lm	1 509 lm
Efficiency	63 lm/W	63 lm/W	63 lm/W	63 lm/W
Input Voltage	DC 24V	AC100~240V	DC 24V	AC100~240V
CCT	Warm white	Warm white	Warm white	Warm white
Beam Angle	15°/20°/30°/45°/60°/ 40x20°/60x10°	15°/20°/30°/45°/60°/ 40x20°/60x10°	15°/20°/30°/45°/60°/ 40x20°/60x10°	15°/20°/30°/45°/60°/ 40x20°/60x10°
Operating temperature	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C

## DIMENSION

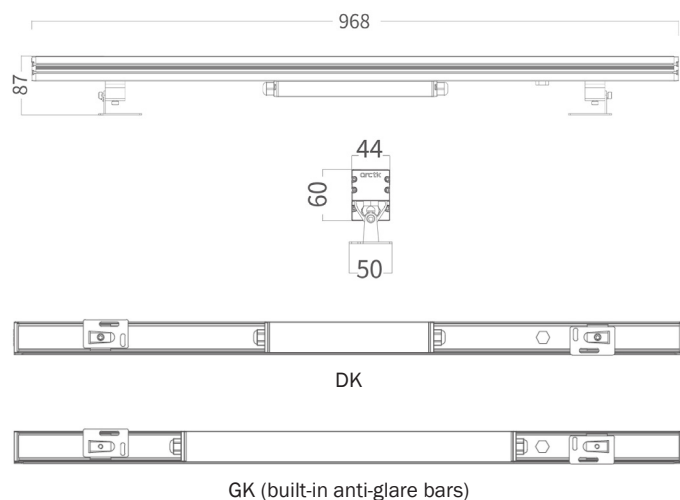

## PHOTOMETRIC CURVE

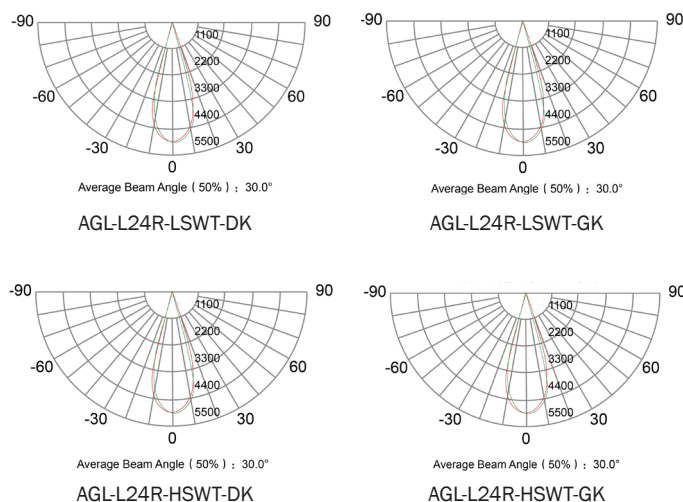


**MODEL** AGL-L36R-LSWT-DK / AGL-L36R-LSWT-GK  
AGL-L36R-HSWT-DK / AGL-L36R-HSWT-GK

**FAMILY** LAR

## DESCRIPTION

The Linear series light is a powerful LED wall washer, suitable for operation in all-weather conditions. It is small in size, light in weight, able to achieve seamless stitching. With flexible section control function, it is possible to realize colorful pixel effect for the hotels, shopping malls, buildings, square landscapes, municipals, bridges, and other outdoor landscape lighting projects to provide new lighting solutions. Extruded aluminium.

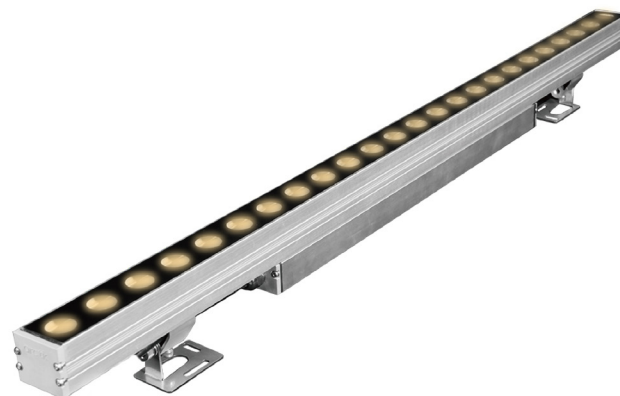

## TYPE OF MOUNTING

Surface Mounting on floor

## COLORS




Silver


## TECHNICAL SPECIFICATIONS

Model	AGL-L36R-LSWT-DK	AGL-L36R-LSWT-GK	AGL-L36R-HSWT-DK	AGL-L36R-HSWT-GK
Power	36 W	36 W	36 W	36 W
Lumens	2 263.56 lm	2 263.56 lm	2 263.56 lm	2 263.56 lm
Efficiency	62 lm/W	62 lm/W	62 lm/W	62 lm/W
Input Voltage	DC 24V	AC100~240V	DC 24V	AC100~240V
CCT	Warm white	Warm white	Warm white	Warm white
Beam Angle	15°/20°/30°/45°/60°/40x20°/60x10°	15°/20°/30°/45°/60°/40x20°/60x10°	15°/20°/30°/45°/60°/40x20°/60x10°	15°/20°/30°/45°/60°/40x20°/60x10°
Operating temperature	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C

## DIMENSION

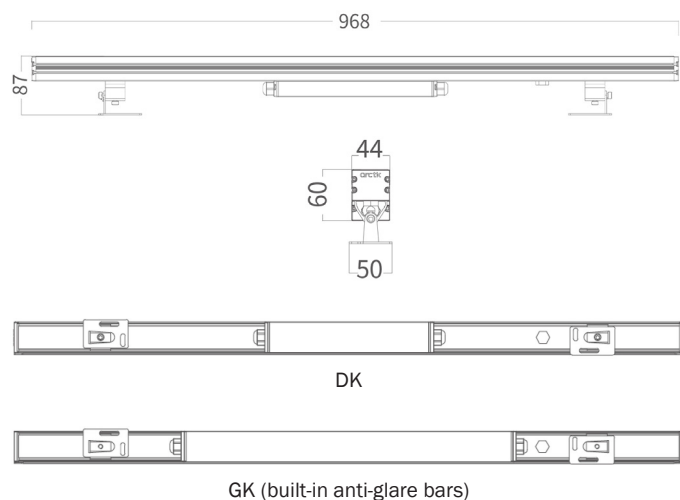


## PHOTOMETRIC CURVE

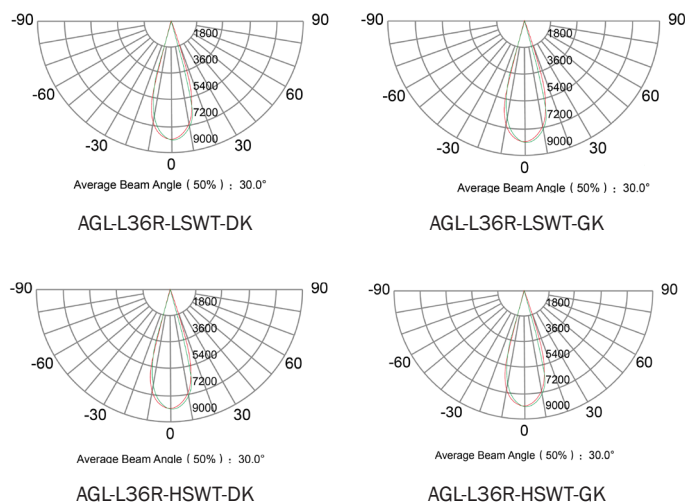

<b>MODEL</b>	<b>AGL-L18R-LXCET-DK / AGL-L18R-LXCET-GK</b> <b>AGL-L18R-HXCET-DK / AGL-L18R-HXCET-GK</b>
<b>FAMILY</b>	<b>LAR</b>

## DESCRIPTION

The Linear series light is a powerful LED wall washer, suitable for operation in all-weather conditions. It is small in size, light in weight, able to achieve seamless stitching. With flexible section control function, it is possible to realize colorful pixel effect for the hotels, shopping malls, buildings, square landscapes, municipals, bridges, and other outdoor landscape lighting projects to provide new lighting solutions. Extruded aluminium.

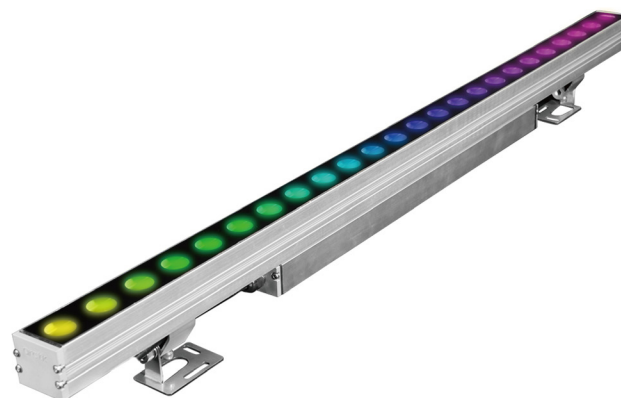

## TYPE OF MOUNTING

Surface Mounting on floor

## COLORS




Silver


## TECHNICAL SPECIFICATIONS

Model	AGL-L18R-LXCET-DK	AGL-L18R-LXCET-GK	AGL-L18R-HXCET-DK	AGL-L18R-HXCET-GK
<b>Power</b>	18 W	18 W	18 W	18 W
<b>Lumens</b>	756 lm	756 lm	756 lm	756 lm
<b>Efficiency</b>	42 lm/W	42 lm/W	42 lm/W	42 lm/W
<b>Input Voltage</b>	DC 24V	AC100~240V	DC 24V	AC100~240V
<b>CCT</b>	RGBW	RGBW	RGBW	RGBW
<b>Beam Angle</b>	15°/20°/30°/45°/60°/ 40x20°/60x10°	15°/20°/30°/45°/60°/ 40x20°/60x10°	15°/20°/30°/45°/60°/ 40x20°/60x10°	15°/20°/30°/45°/60°/ 40x20°/60x10°
<b>Operating temperature</b>	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C

## DIMENSION

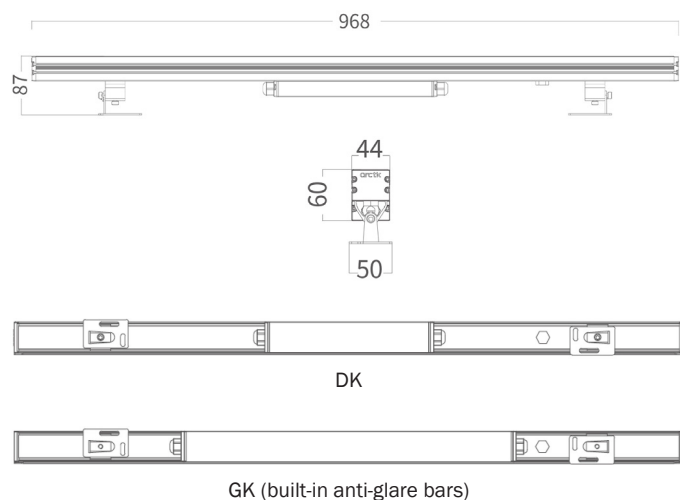


## PHOTOMETRIC CURVE

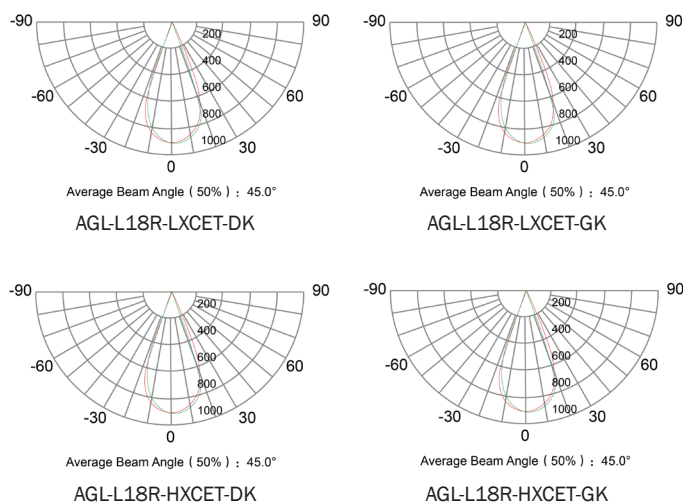

<b>MODEL</b>	<b>AGL-L24R-LXCET-DK / AGL-L24R-LXCET-GK</b> <b>AGL-L24R-HXCET-DK / AGL-L24R-HXCET-GK</b>
<b>FAMILY</b>	<b>LAR</b>

## DESCRIPTION

The Linear series light is a powerful LED wall washer, suitable for operation in all-weather conditions. It is small in size, light in weight, able to achieve seamless stitching. With flexible section control function, it is possible to realize colorful pixel effect for the hotels, shopping malls, buildings, square landscapes, municipals, bridges, and other outdoor landscape lighting projects to provide new lighting solutions. Extruded aluminium.

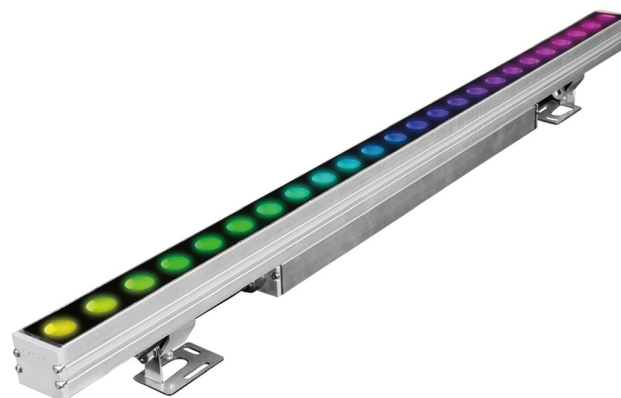

## TYPE OF MOUNTING

Surface Mounting on floor

## COLORS




Silver


## TECHNICAL SPECIFICATIONS

Model	AGL-L24R-LXCET-DK	AGL-L24R-LXCET-GK	AGL-L24R-HXCET-DK	AGL-L24R-HXCET-GK
<b>Power</b>	24 W	24 W	24 W	24 W
<b>Lumens</b>	1 007.99 lm	1 007.99 lm	1 007.99 lm	1 007.99 lm
<b>Efficiency</b>	42 lm/W	42 lm/W	42 lm/W	42 lm/W
<b>Input Voltage</b>	DC 24V	AC100~240V	DC 24V	AC100~240V
<b>CCT</b>	RGBW	RGBW	RGBW	RGBW
<b>Beam Angle</b>	15°/20°/30°/45°/60°/40x20°/60x10°	15°/20°/30°/45°/60°/40x20°/60x10°	15°/20°/30°/45°/60°/40x20°/60x10°	15°/20°/30°/45°/60°/40x20°/60x10°
<b>Operating temperature</b>	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C

## DIMENSION

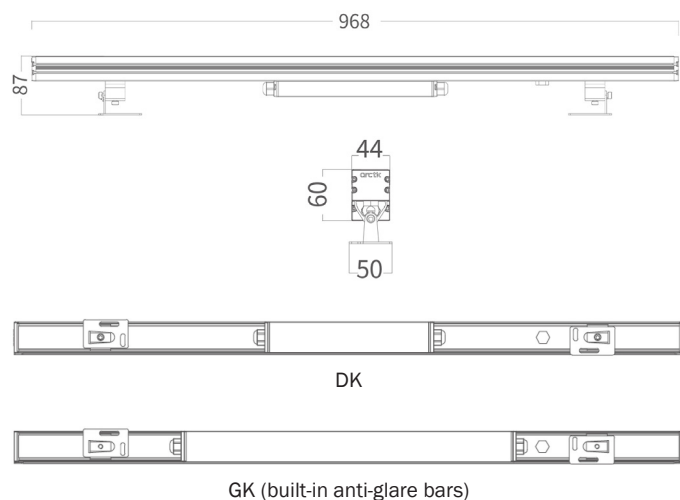

## PHOTOMETRIC CURVE

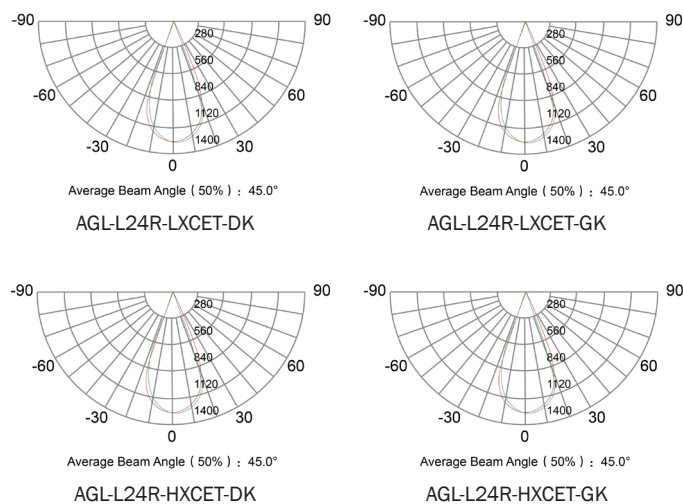




<b>MODEL</b>	<b>AGL-L36R-LXCET-DK / AGL-L36R-LXCET-GK</b> <b>AGL-L36R-HXCET-DK / AGL-L36R-HXCET-GK</b>
<b>FAMILY</b>	<b>LAR</b>

## DESCRIPTION

The Linear series light is a powerful LED wall washer, suitable for operation in all-weather conditions. It is small in size, light in weight, able to achieve seamless stitching. With flexible section control function, it is possible to realize colorful pixel effect for the hotels, shopping malls, buildings, square landscapes, municipals, bridges, and other outdoor landscape lighting projects to provide new lighting solutions. Extruded aluminium.

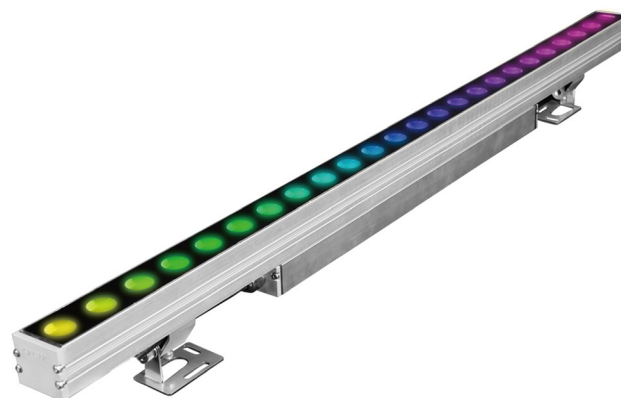

## TYPE OF MOUNTING

Surface Mounting on floor

## COLORS




Silver

## TECHNICAL SPECIFICATIONS

Model	AGL-L36R-LXCET-DK	AGL-L36R-LXCET-GK	AGL-L36R-HXCET-DK	AGL-L36R-HXCET-GK
<b>Power</b>	36 W	36 W	36 W	36 W
<b>Lumens</b>	2 263.56 lm	2 263.56 lm	2 263.56 lm	2 263.56 lm
<b>Efficiency</b>	62 lm/W	62 lm/W	62 lm/W	62 lm/W
<b>Input Voltage</b>	DC 24V	AC100~240V	DC 24V	AC100~240V
<b>CCT</b>	RGBW	RGBW	RGBW	RGBW
<b>Beam Angle</b>	15°/20°/30°/45°/60°/ 40x20°/60x10°	15°/20°/30°/45°/60°/ 40x20°/60x10°	15°/20°/30°/45°/60°/ 40x20°/60x10°	15°/20°/30°/45°/60°/ 40x20°/60x10°
<b>Operating temperature</b>	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C	-40° to 45 °C

## DIMENSION

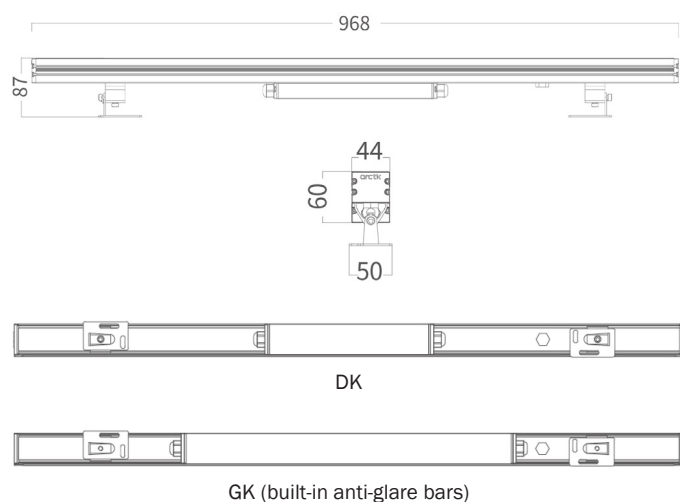

## PHOTOMETRIC CURVE

