



# LINEAR LIGHT



<b>MODEL</b>	AGL-G1202Y-23W3K / AGL-G1202Y-23W4K / AGL-G1202Y-40W3K / AGL-G1202Y-40W4K
<b>FAMILY</b>	GIY

## DESCRIPTION

Strong modern metal housing, Excellent finish.  
Humanization design, Easy to change driver.  
Different length&wattage for option.  
Standard Version/Emergency version available.

## TYPE OF MOUNTING

Ceiling surface mounting




## COLORS




## TECHNICAL SPECIFICATIONS

Model	AGL-G1202Y-23W3K	AGL-G1202Y-23W4K	AGL-G1202Y-40W3K	AGL-G1202Y-40W4K
<b>Power</b>	23 W	23 W	40 W	40 W
<b>Lumens</b>	2 560 lm	2 760 lm	4 460 lm	4 800 lm
<b>Efficiency</b>	80 lm/W	90 lm/W	84 lm/W	92 lm/W
<b>Input Voltage</b>	240V/110V	240V/110V	240V/110V	240V/110V
<b>Current</b>	700mA	700mA	1 050mA	1 050mA
<b>CCT</b>	3 000 K	4 000 K	3 000 K	4 000 K
<b>Beam Angle</b>	120°	120°	120°	120°
<b>CRI</b>	80	80	80	80
<b>Operating temperature</b>	-20°C to 40°C	-20°C to 40°C	-20°C to 40°C	-20°C to 40°C

## DIMENSION



## PHOTOMETRIC CURVE

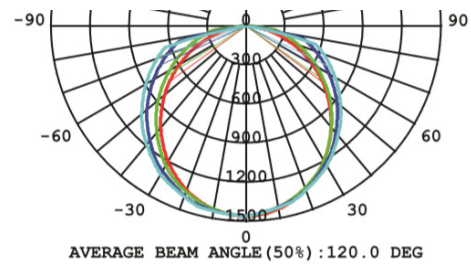

AGL-G1202Y-40W4K

